

## Specim FX10 FOV46 lens specifications

### 1. Technical specifications

#### 1.1. General information

Spectral camera	Specim FX10
Wavelength range ( $\mu\text{m}$ )	0.4 - 1.0
Product code	0608039

#### 1.2. Specifications with spectral camera

PARAMETER	VALUE	COMMENT
Nominal working distance (mm)	1000	Working distance used for all specifications
Field of view (deg)	46	Nominal value
Entrance pupil position (mm)	26.7	From the first lens surface
Working distance (mm)	300 - $\infty$	Distance from the object to the first lens surface
Minimum object length (mm)	277	Object length at minimum working distance
Adjustable focus	Yes	Focus can be adjusted and locked
Filter thread	M52 x 0.75	
Lens mount	C-mount	Adapter to custom mount required (Product No 0106193)
Resolution (pix)	2.2	Average over all field points and wavelengths
MTF (%) at 30 lp/mm	55	
Maximum distortion (%)	-2.9	
Minimum relative illumination (%)	86	

#### 1.3. Specifications for lens only (A) and lens with spectral camera (B)

PARAMETER	A	B	COMMENT
Image width (mm)	10.2	8.2	
Effective focal length (mm)	12.4	9.9	At infinite working distance; tolerance $\pm 1\%$
Working F-number	2.1 - closed	1.7 - closed	Setting lens F-number below 2.1 does not increase the throughput
Average transmission (%)	80	-	
Dimensions (mm)	55 x 99	-	Diameter x Length

All specification values given above are valid at the nominal working distance if not stated otherwise.

## 2. Figures

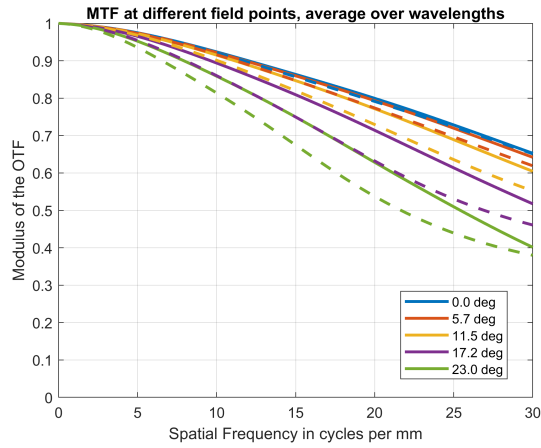


Figure 1. MTF averaged over wavelengths as a function of frequency.

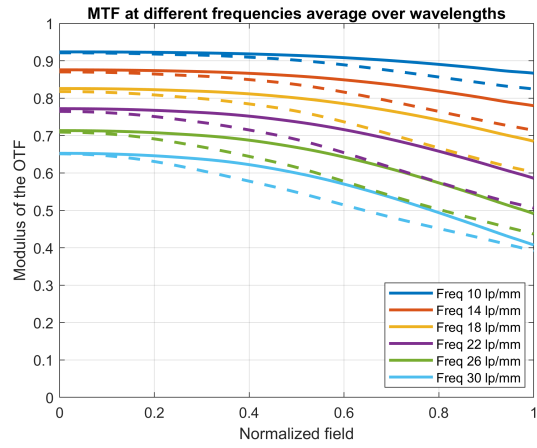


Figure 2. MTF averaged over wavelengths as a function of normalized field.

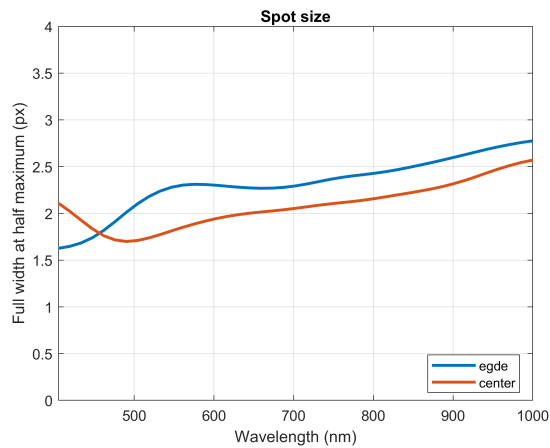


Figure 3. Full width at half maximum of the spatial spot as a function of wavelength.

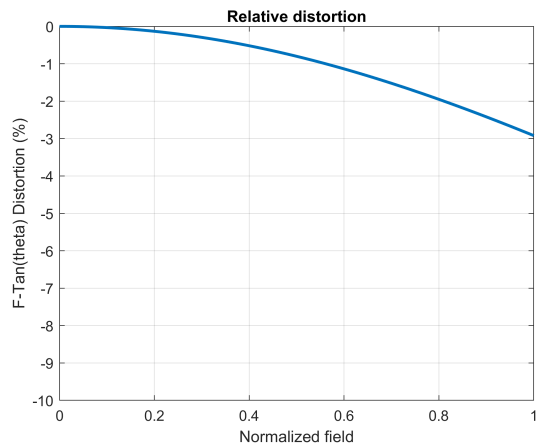


Figure 4. Relative distortion as a function of normalized field.

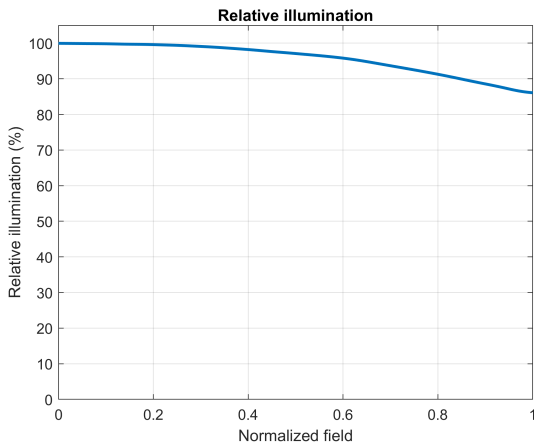


Figure 5. Relative illumination as a function of normalized field.

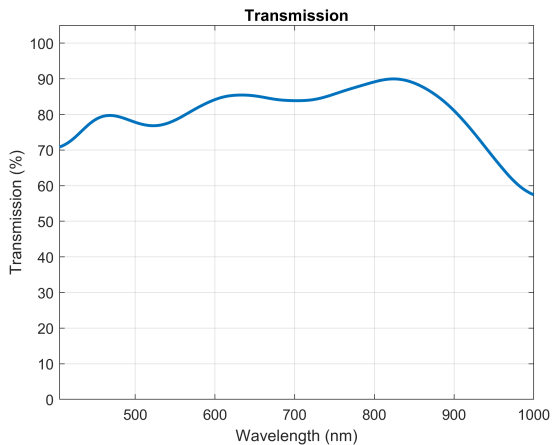


Figure 6. Transmission as a function of wavelength (lens only).

All specification values given above are valid at the nominal working distance if not stated otherwise.

### 3. Object dimensions and depth of field at different working distances

WORKING DISTANCE (CM)	NOMINAL OBJECT DIMENSIONS		DEPTH OF FIELD (MM)
	ACROSS TRACK / LENGTH (MM)	ALONG TRACK / WIDTH (MM)	
30	277	1.1	26
40	362	1.4	45
50	447	1.8	71
60	532	2.1	100
70	617	2.5	140
80	702	2.8	180
90	787	3.1	230
100	873	3.5	280
150	1300	5.2	650
200	1720	6.9	1200
300	2570	10.3	3000
500	4280	17.0	13000